


Niloé™
Socket outlets - Czech

Cat. No(s): 7 645 33/43 - 7 646 33/43




1. USAGE

2 x 2 P+E socket outlet (Czech) with or without shutters.
 Flush-mounting or surface-mounting.
 Fixing with screws.

2. RANGE

SOCKET OUTLETS WITH SHUTTERS	White	Ivory
2 x 2 P+E compact socket outlet Installation in 1-gang flush-mounting box Supplied complete with plate Allows you to replace 1 socket with 2 sockets without changing the flush-mounting box	7 645 43	7 646 43
SOCKET OUTLETS WITHOUT SHUTTERS	White	Ivory
2 x 2 P+E compact socket outlet Installation in 1-gang flush-mounting box Supplied complete with plate Allows you to replace 1 socket with 2 sockets without changing the flush-mounting box	7 645 33	7 646 33

3. DIMENSIONS (mm)

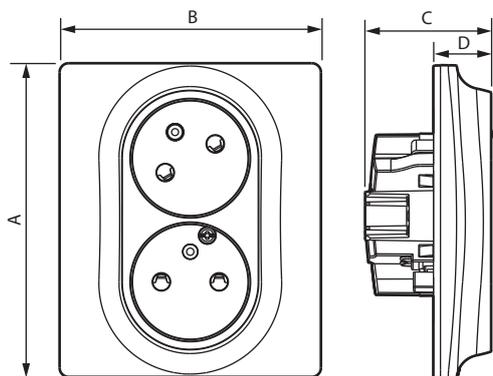

A	B	C	D
104	86	42	19.5

4. CONNECTION

Type of terminals: with screws
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 13 mm
 Screwdriver: Posidrive 1, Philips 1, flat 4 mm.

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**
 Protection against solid bodies and liquids: IP 31
 Protection against impact: IK 04

■ **5.2 Material characteristics**
 Polyglass appearance
 Colour: - White RAL 9003
 - Ivory RAL 1013
 Material: - Plate ABS
 - Socket cover plate: PC
 - Halogen free
 - UV resistant

Self-extinguishing:
 + 850° C / 30 s for insulating parts holding live parts in place
 + 650° C / 30 s for other parts made of insulating materials.

■ **5.3 Electrical characteristics**
 Voltage: 250 V~
 Current: 16 A
 Frequency: 50/60 Hz

■ **5.4 Climatic characteristics**
 Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

6. MAINTENANCE

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.
 Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 Refer to e. catalogue.